



Thank you for using SA-60U Public Address Amplifier, please carefully read the user guide before any operation.

The products includes pre-amplifier so you can directly connect the sound source and play it! The amplifier has Outputs: main 4-16ohm/70V/100V and Inputs: 1 Aux Inputs, 2 MIC Inputs with Microphone Priority, USB/SD Card, Bluetooth etc. Both of the 2 Aux, 2 Mic, USB and Bass/Treble Volume can be controlled individually.

This Amplifier have over-current protection, over-voltage protection, short-circuit protection, DC protection and Boot time delay etc.

Service Regulations

1. Preparation

- A. Check all the input interface and ensure all the interfaces are intact. The Interfaces includes 3 Auxiliary Input, 2 Microphone Input, USB Port, SD Port and FM, Bluetooth etc.
- B. Ensure that the external load is less than the machine rated load, or the amplifier will not work normally.
- C. Check the Grid that will be used, if the Grid seriously fluctuates or is over 240V then you need a AC Stabilified Voltage Power.


2. Start

- A. Insert the power plug into an 220V 50Hz outlet.
- B. Connect the Input Signal.
- C. Connect the Load Speaker.
- D. Turn on the power, and slowly turn up the volume, observe the Output Level LED and ensure the amplifier is not overloaded.

Caution

1. Although the machine has reliable short circuit protection, we suggest you to use carefully and avoid short circuit in order to increase the service life.
2. The machine should be moisture-proof packaged and make sure prevent vibration during handling.
3. If the amplifier is overloaded, please turn down the volume.

Front Panel

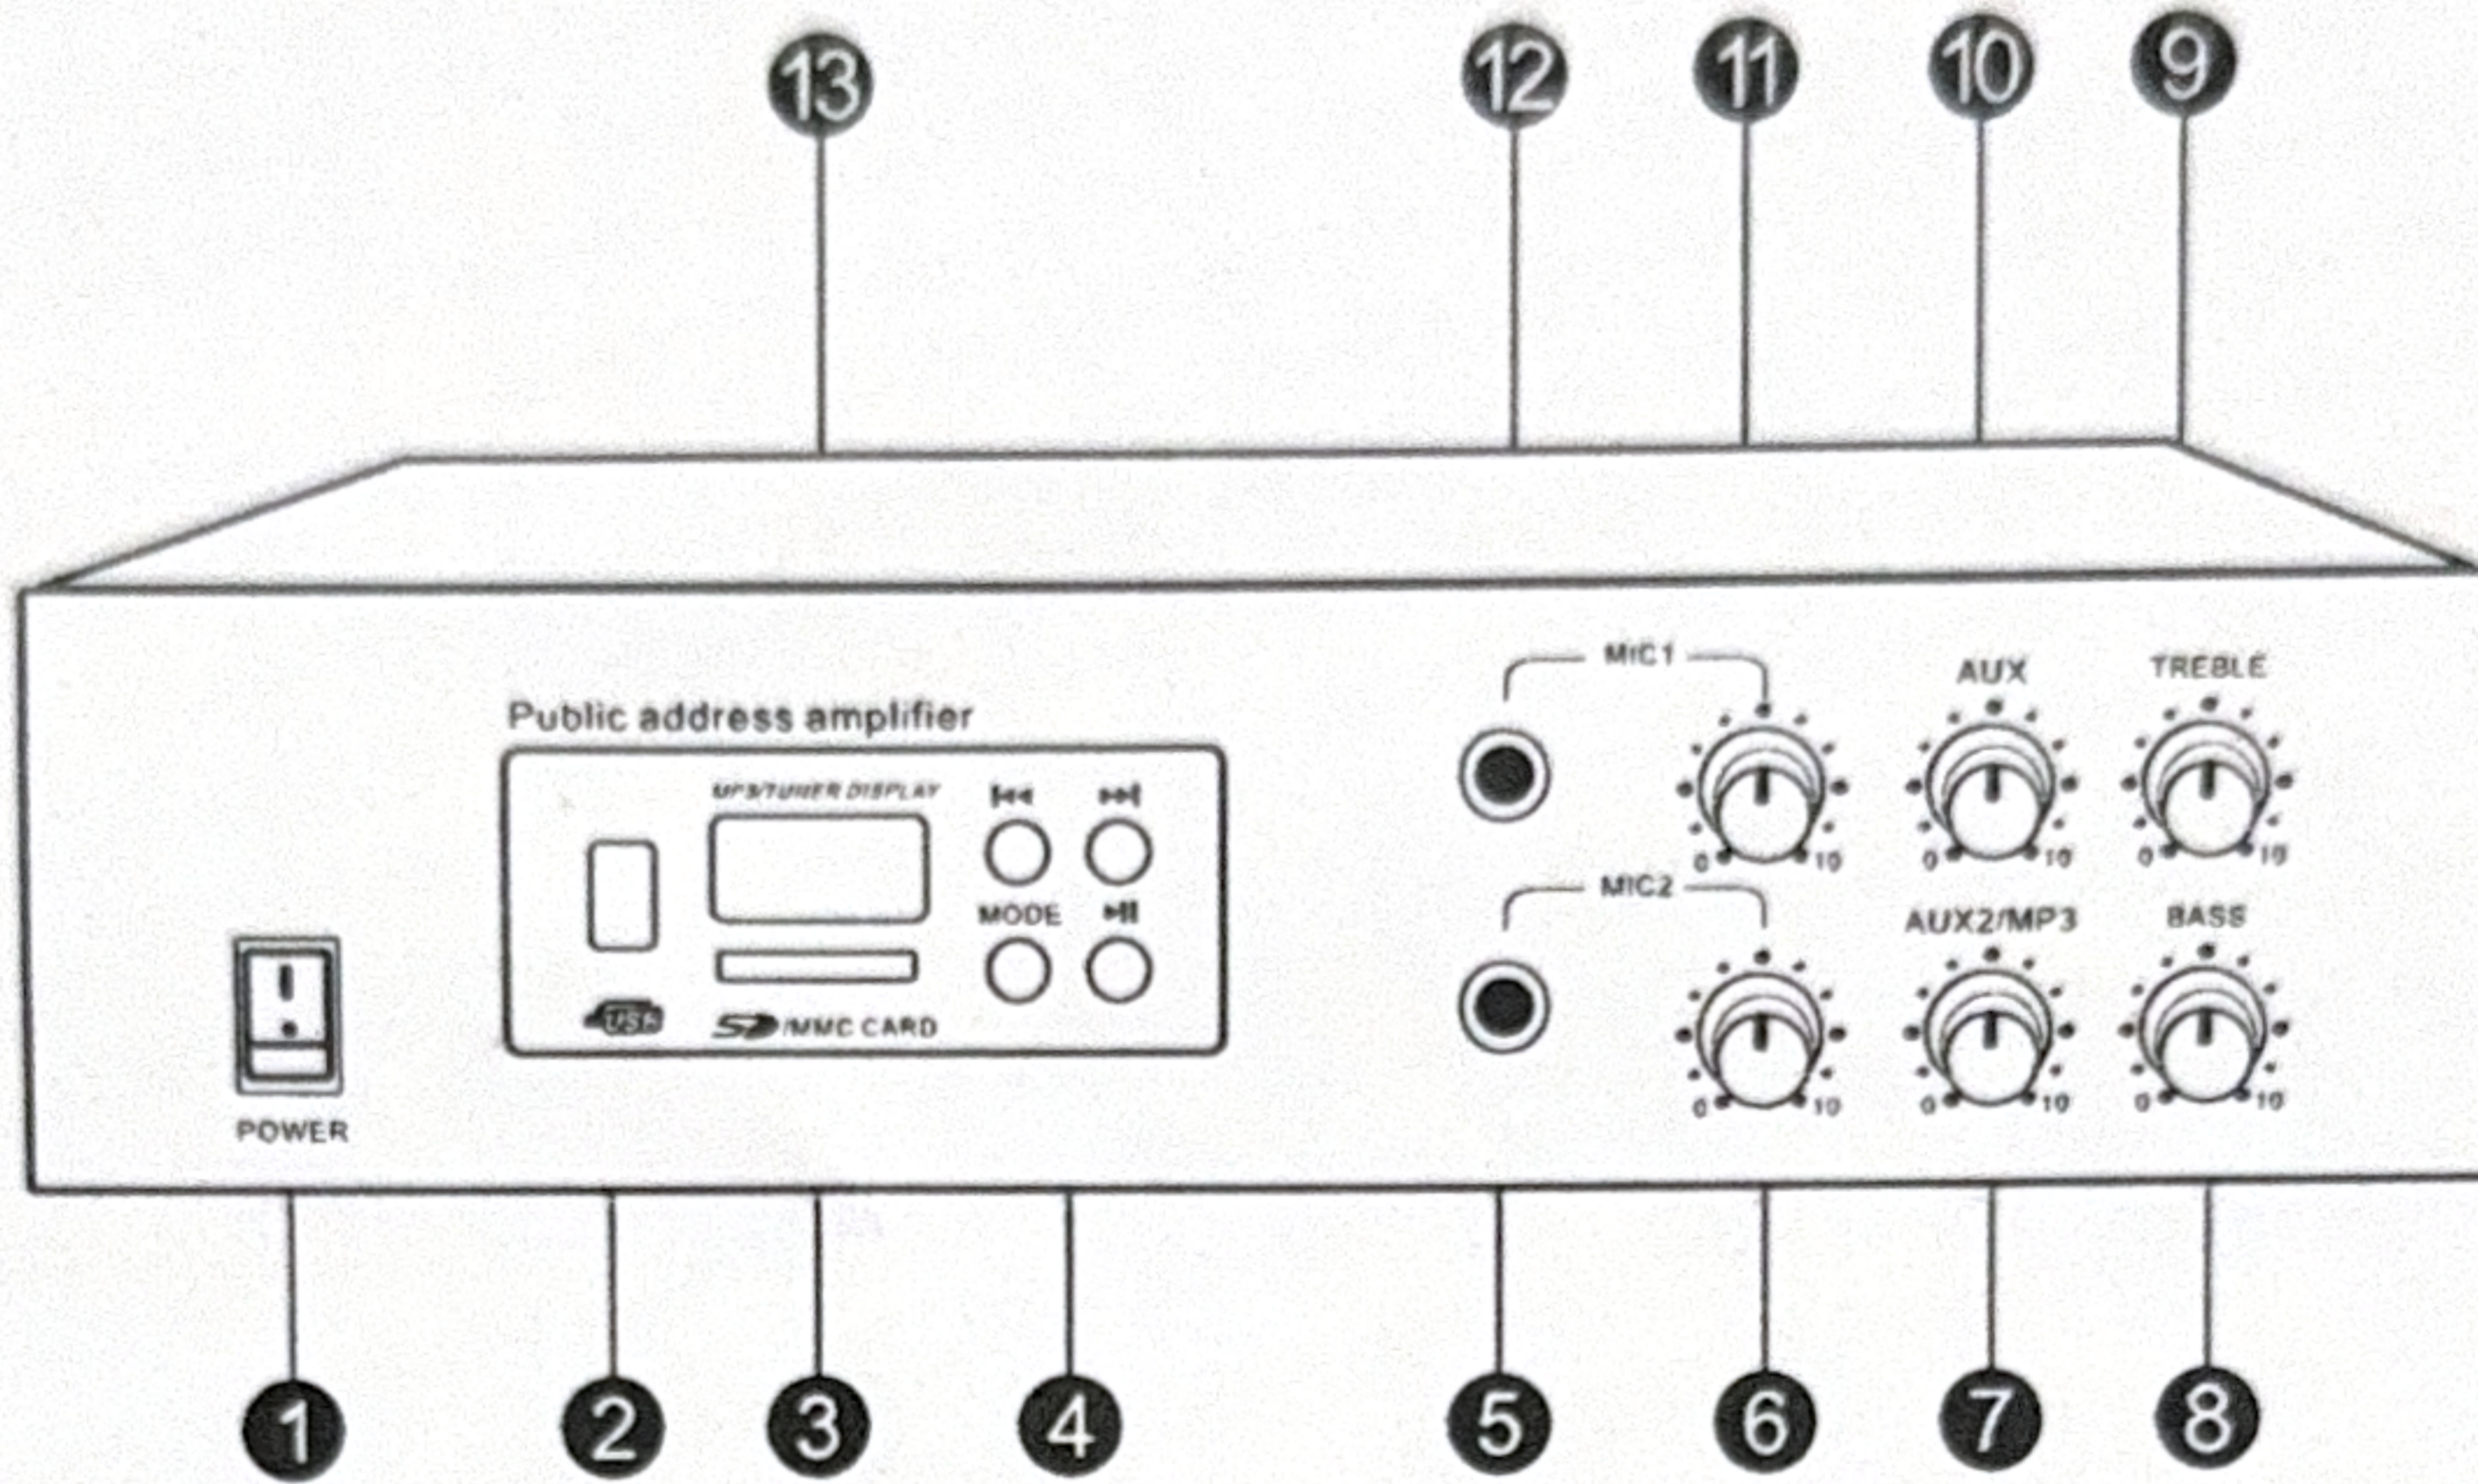

1. Power Switch

2. USB Port

3. SD Port

4. MP3 Module:

1) Short Press: Mode Switch; Long Press:

Enable Mute

2) Short Press: Prev Song; Long Press: Vol-

3) Short Press: Next Song; Long Press: Vol+

4) Play/Pause

5. Mic2 Input

6. Mic2 Vol Control

7. Line2/MP3 Vol Control

8. Bass Vol Control

9. Treble Vol Control

10. Line1 Vol Control


11. Mic1 Vol Control

12. Mic1 Input

13. LED Screen



Back Panel

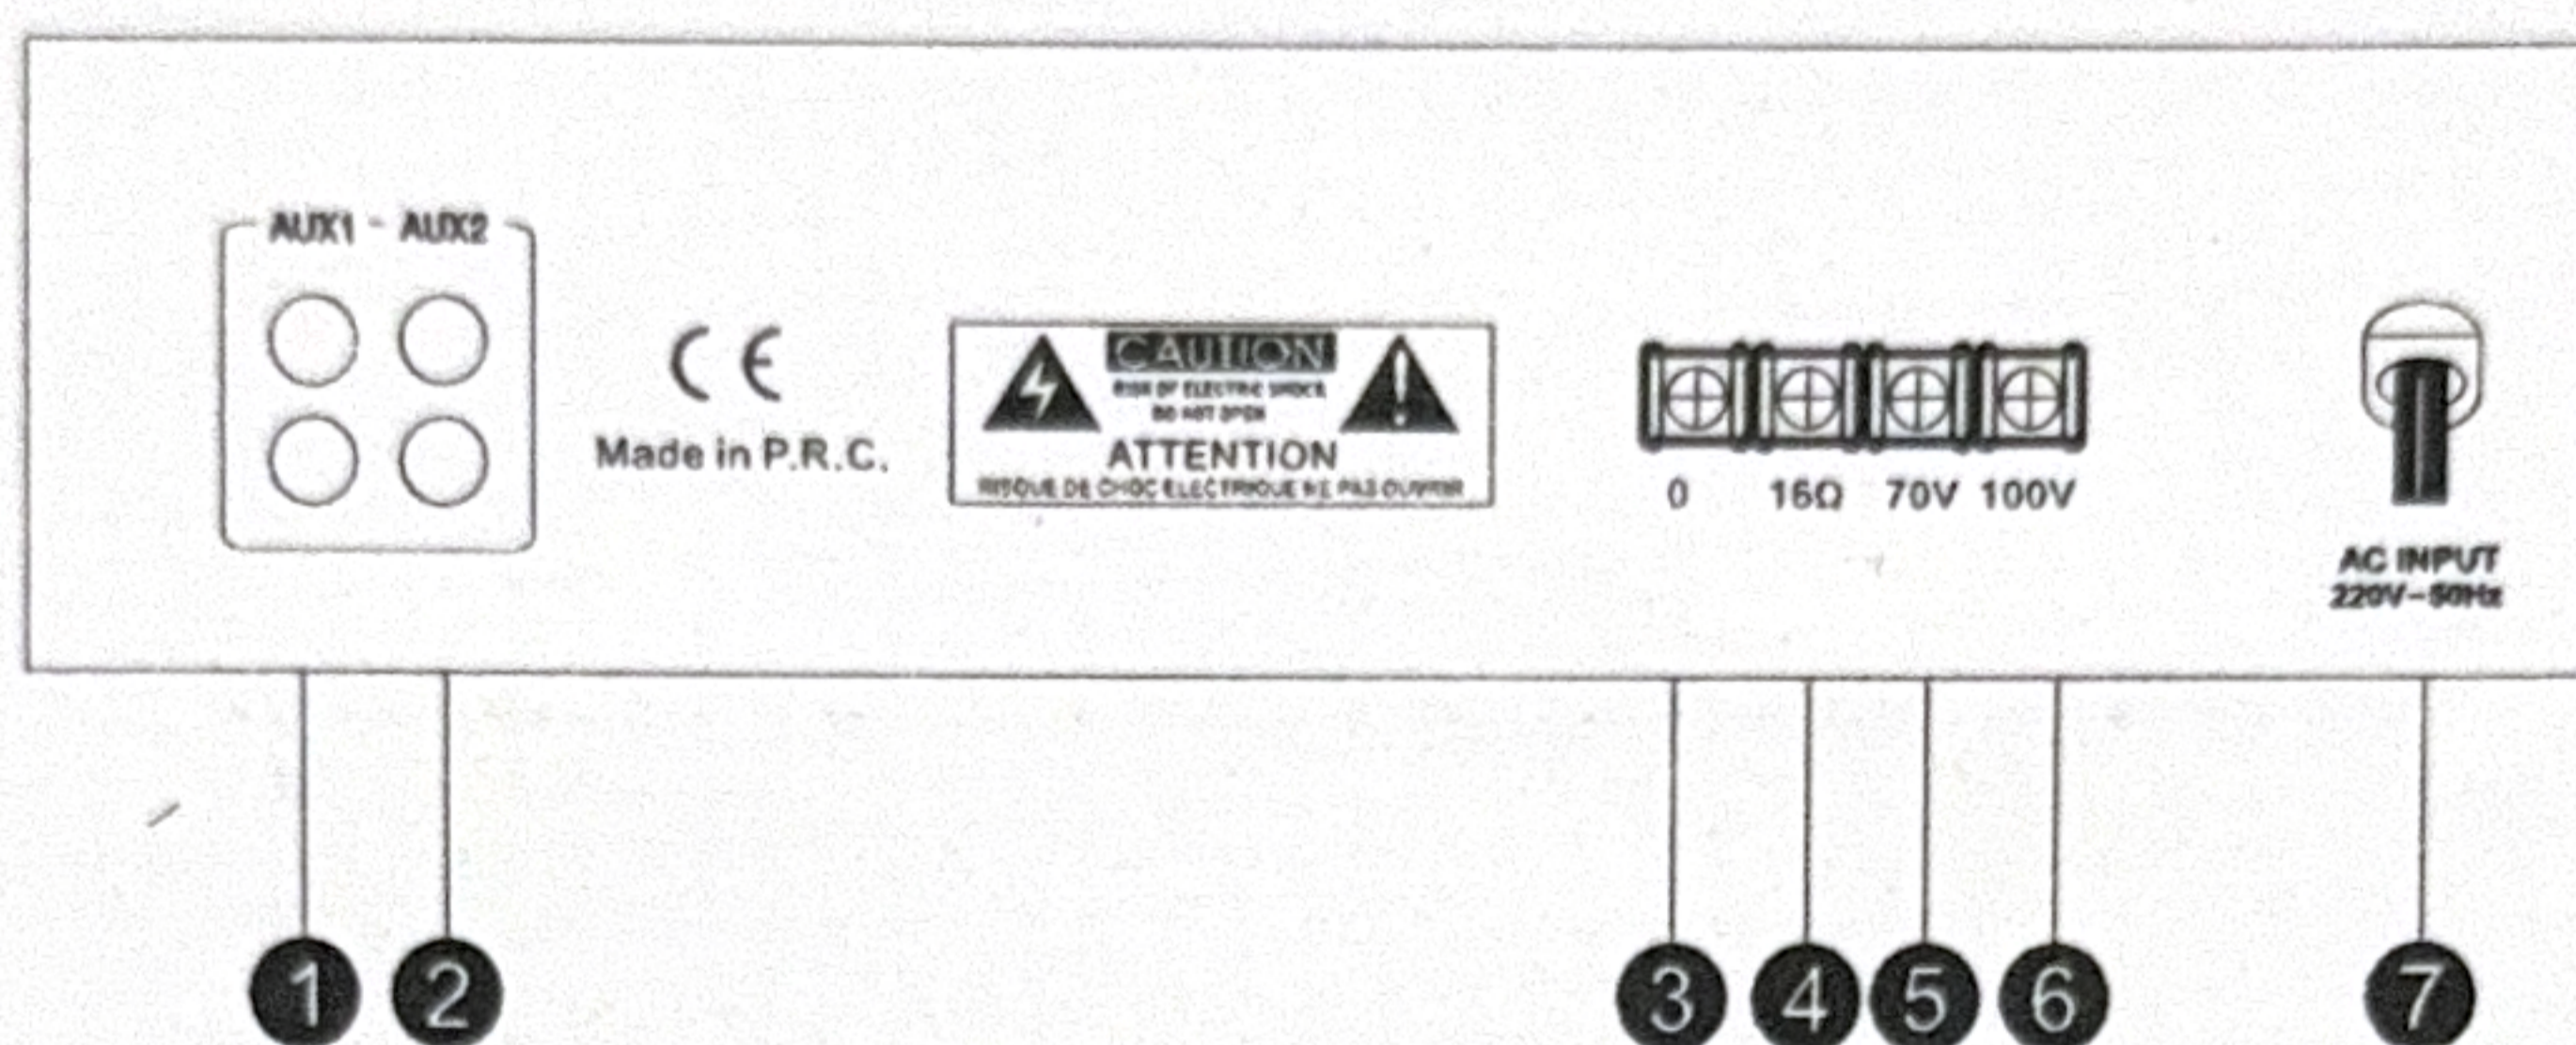

1. Line1 Input

2. Line2 Input

3-6. 4-16ohm/70V/100V SPK OUT

7. Power Plug

Connect and Operate

- * Please confirm the power supply voltage is in conformity with the machine.
- * Please turn off the power when connect input and output.
- * Please confirm the speaker load is in conformity with the machine.
- * Turn down the main volume when turn on the power.